

Transparency
and natural light

.....

new Colours
Collection

.....

Applications

Facade blinds, veranda and glass roof blinds, drop-arm awning, pergolas and canopies, roll-up valances and shade sails



■ **Excellent transparency**

Soltis Horizon 86 provides excellent outward visual contact to enjoy the view even when the awning is lowered. It proves its efficiency by blocking up to 93% of the heat in outdoor use.

■ **Optimised natural light contribution**

Soltis Horizon 86 promotes natural light intake. This is beneficial in terms of:

- energy savings by reducing the use of artificial lighting.
- the well-being, health and productivity of people in a professional or private environment.

■ **Harmonised ranges**

All the colours of Soltis Horizon 86 are coordinated with Soltis Perform 92 to:

- harmonises all the facades of a building.
- meets visual comfort needs according to each facade's orientation.
- adjusts thermal protection to save energy.

BLOCKS UP TO
93%
OF THE HEAT

ALLOWS NATURAL
LIGHT TRANSMISSION
OF UP TO
28%



Soltis Horizon 86 - 3 key properties




Dimensional stability
thanks to Preconstraint technology



Easy to clean




UV resistant

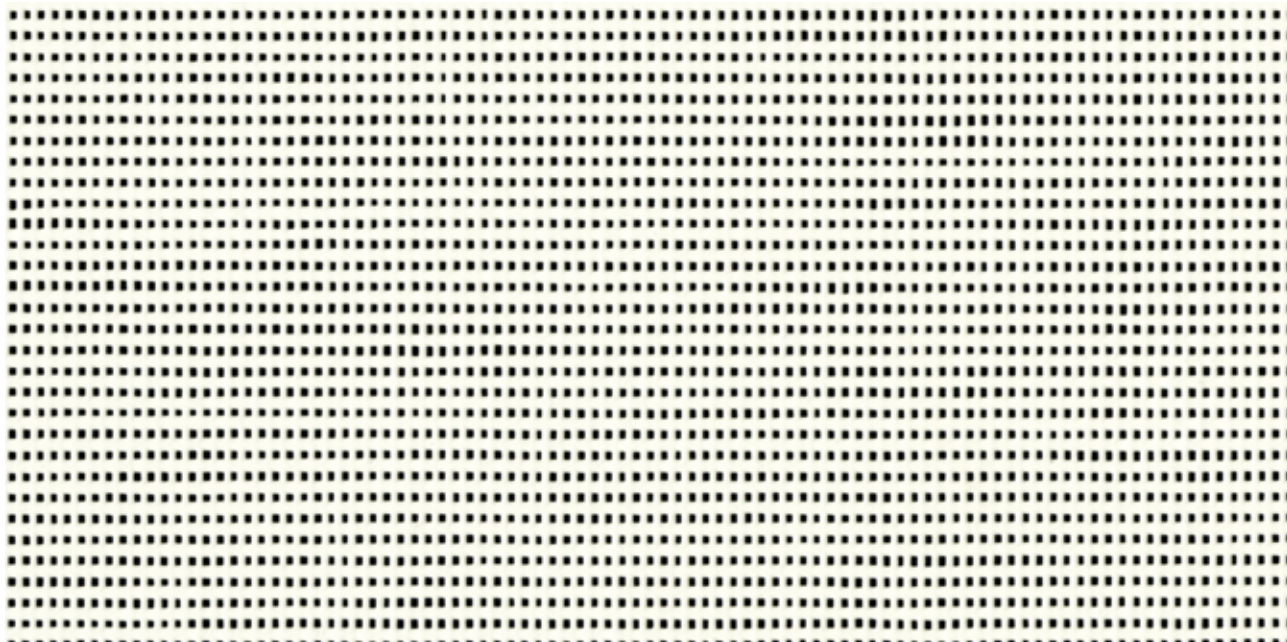


new Snow white 177 cm — 267 cm

86-50690

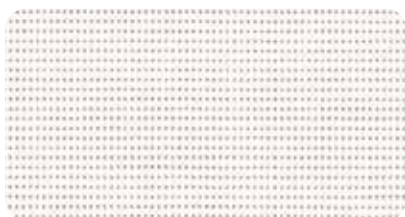


White 177 cm — 267 cm

86-2044

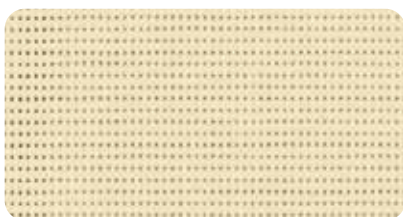


Champagne 177 cm — 267 cm

86-2175

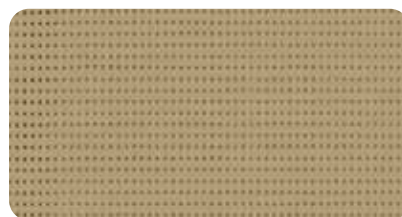


Pepper 177 cm — 267 cm

86-2012

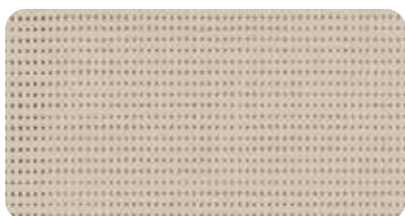


Sandy beige 177 cm — 267 cm

86-2135

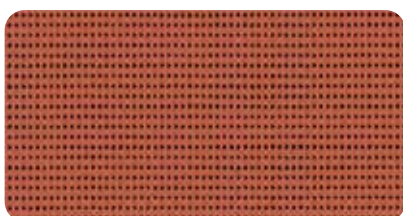


new Brick 177 cm

86-51180

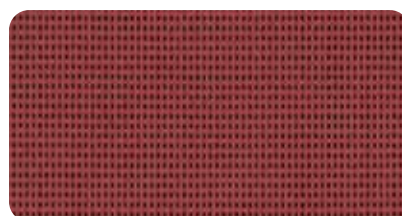


new Deep red 177 cm

86-51181

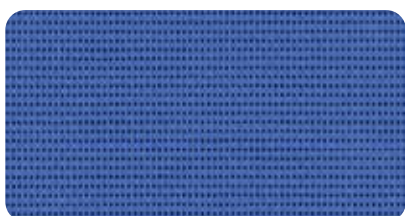


new Deep blue 177 cm

86-51182

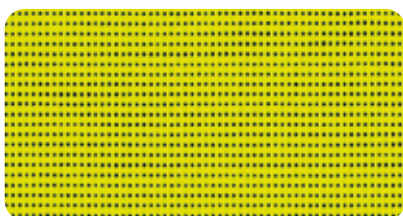

new Aniseed 177 cm

86-2157

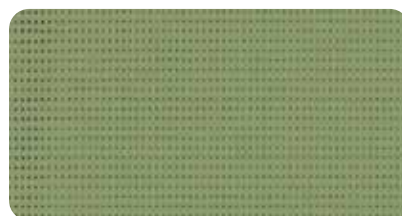


Moss green 177 cm

86-2158



Buttercup 177 cm

86-2166

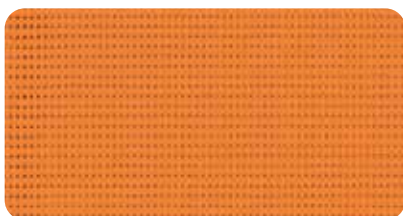


Orange 177 cm

86-8204




Red 177 cm


86-8255

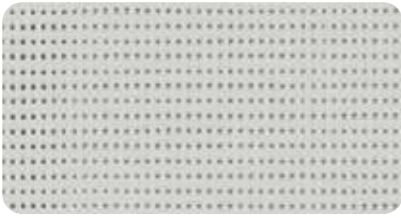


Boulder 177 cm — 267 cm 86-2171

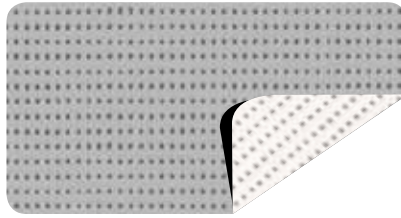


Alu/White 177 cm — 267 cm 86-2051

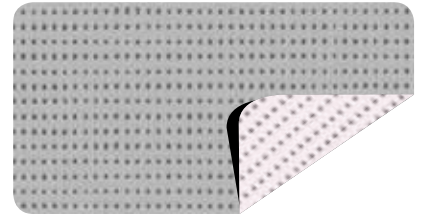


Alu/Oat 177 cm — 267 cm 86-2046

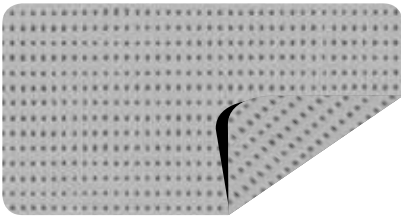


Alu/Alu 177 cm — 267 cm 86-2048

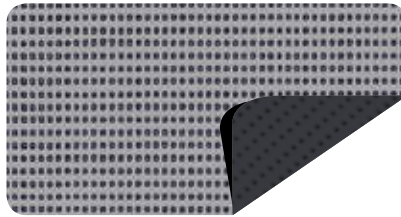

Alu/Anthracite 177 cm 86-2068

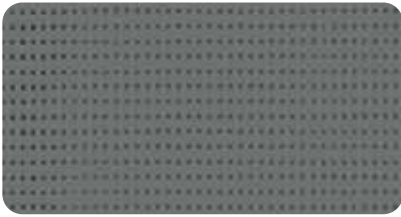

Concrete 177 cm — 267 cm 86-2167

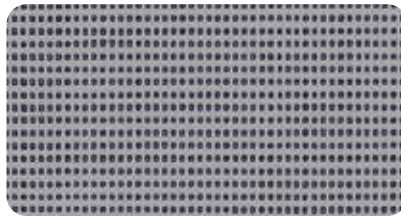

Beaten metal 177 cm — 267 cm 86-2045



Bronze 177 cm — 267 cm 86-2043



Anthracite 177 cm — 267 cm 86-2047



new Deep black 177 cm — 267 cm 86-51176

new Colours
Collection


A range of colours to match every kind of project

The new Soltis Horizon 86 range features colours designed by our design office to complement the building's entire environment (joinery, openings and facades). The colours present tones that match the most common colours (RAL and NCS references).



■ Exclusive Precontraint® technology

This unique globally patented technology consists of maintaining the composite in bi-axial tension throughout the manufacturing cycle. This gives our materials outstanding performance allowing them to surpass market standards in terms of dimensional stability, mechanical strength, coating thickness and flatness.

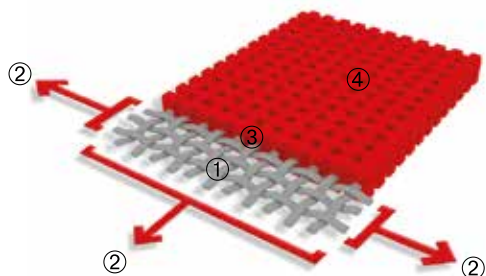

High tenacity polyester micro-cable reinforcement	①	Superior resistance to elongation and tearing
Coating under bi-axial tension, exerted in warp and weft	②	No deformation during implementation and use
Superior coating at the crest of the wires and anti-fouling surface treatment	③	Superior aesthetic and mechanical durability
Extreme flatness and low thickness	④	Smooth, easy to clean surface with small footprint and easy winding

■ Solar and light properties (selon EN 14501)

		Width (in cm)		TS	RS	AS	TV n-h	EN13363-2* Glazing D	
		177	267					g_{tot}^e	g_{tot}^i
86-2012		•	•	18	27	55	16	0.08	0.24
86-2043		•	•	15	11	74	15	0.07	0.28
86-2044		•	•	29	59	12	28	0.11	0.15
86-2045		•	•	16	29	55	16	0.08	0.23
86-2046A		•	•	22	40	38	21	0.10	0.16
86-2046B		•	•	22	55	23	21	0.09	0.20
86-2047		•	•	17	7	76	17	0.07	0.28
86-2048		•	•	19	39	42	19	0.09	0.20
86-2051 A		•	•	22	40	38	20	0.09	0.13
86-2051 B		•	•	22	60	18	20	0.09	0.20
86-2068 A		•		17	31	52	17	0.08	0.23
86-2068 B		•		17	7	76	17	0.09	0.28
86-2135		•	•	24	39	37	22	0.09	0.21
new 86-2157		•		25	44	31	21	0.08	0.21
86-2158		•		18	25	57	16	0.08	0.25
86-2166		•		31	45	24	28	0.11	0.21
86-2167		•	•	17	14	69	17	0.07	0.26
86-2171		•	•	22	36	42	20	0.08	0.21
86-2175		•	•	30	57	13	28	0.11	0.16
86-8204		•		29	41	30	21	0.10	0.23
86-8255		•		21	24	55	14	0.07	0.27
new 86-50690		•	•	28	61	11	27	0.11	0.14
new 86-51176		•	•	14	5	81	14	0.07	0.29
new 86-51180		•		17	24	59	15	0.07	0.26
new 86-51181		•		18	14	68	16	0.08	0.28
new 86-51182		•		18	23	59	15	0.07	0.27

A: Aluminium surface exposed to the sun

B: Coloured surface exposed to the sun

TS: Solar Transmission in %

RS: Solar Reflection in %

AS: Solar absorption in %

TS+RS+AS= 100% of the incident energy

TV n-h: Normal Visible light transmission - hemispherical in %

g_{tot}^e : External Solar Factor

g_{tot}^i : Indoor Solar Factor

* Detailed
EN 13363-2 method

Takes into account the spectral values of glazing transmission and reflection + blind complex for calculating the solar factor g_{tot} .
Type "D" glazing: insulating double glazing with low emissivity on surface 2 (4 + 16 + 4; Argon filling) $g = 0.32 - U = 1.1$

Soltis Horizon 86

■ Technical properties

		Standards
Openness factor	14%	
Weight	380 g/m ²	EN ISO 2286-2
Thickness	0.45 mm	
Width	177 cm - 267 cm	

■ Roll length

Standard format: 177 cm	50 lm	
Standard format: 267 cm	40 lm	

■ Physical properties

Breaking resistance (warp / weft)	230/160 daN/5 cm	EN ISO 1421
Tear resistance (warp / weft)	45/20 daN	DIN 53.363

■ Reaction to fire

Rating	M1 /NFP 92-507 — B1 /DIN 4102-1 — BS 7837 — BS 5867 — Schwerbrennbar-Q1-Tr1 /ONORM A 3800-1 — Classe 1 /EN 13373 — M1 /UNE 23.727-90 — VKF 5.3 /SN 198898 — 1530.3/ AS /NZS G1 /GOST 30244-94 — Method 1 /NFPA 701 — CSFMT19 — Class A /ASTM E84	
Euroclass	B-s2.d0	EN 13501-1

■ Management system

Quality	ISO 9001	
---------	----------	--

■ Certifications. labels. guarantees. recyclability



bim
object®



with **S+** Serge Ferrari goes further ...
(information available on request)



■ Tools and services